


For Further Information Contact:
René Witte, sales manager
OPW Fluid Transfer Group Europe BV
(+31) 252 660 345 or rwitte@opw-ftg.nl

PRESS RELEASE

Hiltap Fittings quick couplings Zero Harm Total Integrity

OPW Fluid Transfer Group Europe B.V. introduces **HILTAP** dedicated
engineered and patented solutions for pipe, tube and hose connections used in extreme
High/**L**ow **T**emperature **A**nd **P**ressure applications.

The Twister Locking Quick Connect is the next generation of quick couplings designed to replace conventional “Cam and Groove” couplings used in critical service applications. The Twister LQC is engineered to be used in conjunction with hoses and/or loading arms and has a built in pressure locking safety feature. The coupling will lock up during uncoupling should there be residual pressure in the line, and the ¼ twist rapid engagement makes it user friendly. Twister LQC’s smooth bore makes it ideal for use in pigging applications. Twister LQC is built to B31.3 specifications and ISO 9001-2000 quality standards and has pressure ratings equivalent to ANSI 150/300.

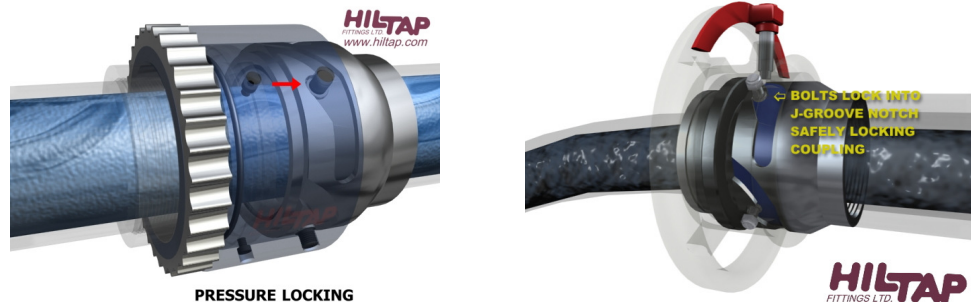

For more information on OPW Fluid Transfer Group products, please visit www.opw-ftg.nl